FILT&SWAP Inline filter

Ref. AT50670

Active charcoal and 0.2µm microfiltration



DESCRIPTION

FILT&SWAP Inline filter

Ref. AT50670

FILT&SWAP duo inline anti-Legionella filter: active charcoal and 0.2µm microfiltration.
Active charcoal: reduces taste, smells and chlorine in water.
Microfiltration: retains all bacteria and other particles larger than 0.2 µm.
Filter cartridge can be replaced without changing the filter body.
Membrane surface area: 0.5m².
Capacity: 18,000L.
Maximum lifespan: 6 months.
Filtration flow rate: 9 L/min (with integrated flow restrictor), 14 L/min (without flow restrictor) at 3 bar.
Materials: Polypropylene body. ABS plastic parts of the filter cartridge. Polyethylene microfiltration cartridge.
Temperature: 4 - 38°C.
Operating pressure: 0.5 to 10 bar.
Connection: G3/8" tube or thread.
Compatible with and resistant to chemical shocks (active chlorine levels up to 100 ppm for 1 hour (cumulative total) and thermal shocks (70°C for 30 minutes).


ADVANTAGES

- Anti-Legionella
- 6 months

TECHNICAL CHARACTERISTICS

FILT&SWAP Inline filter - Ref. AT50670

Supply	Tube or G3/8"
Length	335mm
Flow rate	9 lpm (with integrated flow restrictor), 14 lpm (without flow restrictor) at 3 bar
Diameter	82mm
Lifespan	6 months
Norms	ACS WRAS

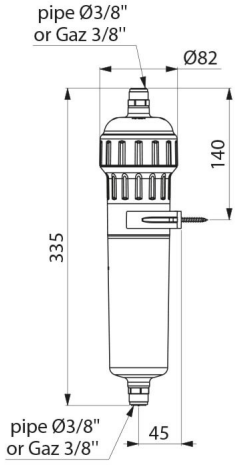

© AQUATOOLS