# FILT'RAY 4-month shower head

Ref. AT030725

Non-sterile



## DESCRIPTION

**FILT'RAY 4-month shower head**

**Ref. AT030725**

AQUATOOLS anti-Legionella and all-germ shower filter.
Device made from MBS.
Membrane type: tubular microfiltration.
Membrane made from polyethylene.
Pore cut-off threshold: 0.1µm nominal and 0.2µm absolute sterilising grade.
Filtration flow rate: 11.9 lpm at 3 bar and 4.5 lpm at 1 bar
(filter only, excludes any flow rate restriction in the shower).
Maximum upstream pressure at the point-of-use: 5 bar.
Maximum lifespan: 4 months from installation.
Withstands thermal shocks: 70°C for 30 minutes.
Withstands chemical shocks: active chlorine levels up to 100 ppm for 4 hours (cumulative total).
Non-sterile filter.
CE marked Class I medical device.
Packaged in boxes of 10.

## ADVANTAGES

- Anti-Legionella and all-germ
- Lifespan: 4 months from installation
- Bubl'air Wash: extends filter life
- Installation rapide sans outil

## TECHNICAL CHARACTERISTICS

**FILT'RAY 4-month shower head - Ref. AT030725**

| | |
|---|---|
| Connector | M1/2" |
| Technology | Point-of-use filtration |
| Height | 70mm |
| Length | 225mm |
| Flow rate | 11.9 lpm at 3 bar and 4.5 lpm at 1 bar |
| Lifespan | 4 months |
| Norms | ACS CE WRAS |

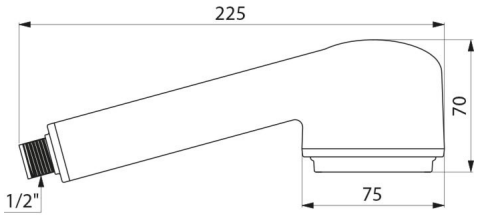


© AQUATOOLS